

# CIMC VANGUARD

## Single Axle Converter Dolly

### DIMENSIONS and capacities

Weight (+/- 3%) 2,800 lbs

G.A.W.R 20,000 lbs


Overall Length 117.1"

Overall Width 102"



### FRAME and related components

Hot Dipped Galvanized • Welded I-Beam  
GR1000 Alloy Steel Triples Rated Safety Chains  
Fifth Wheel with Release Handle  
Adjustable Jack Leg

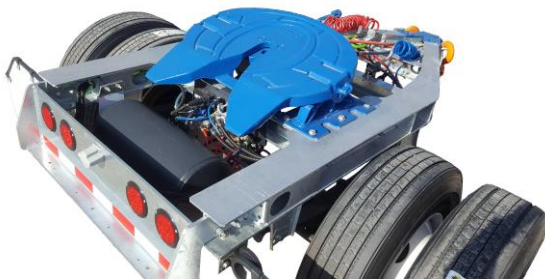

### SUSPENSION and related components

3-Leaf Springs • Galvanized Hangers  
High Performance Wheel Seals  
Synthetic Grease SF • Vented Hubcaps  
Lightweight Steel Wheels

### ELECTRICAL

7-Way Wiring Harness  
LED Lights



### BRAKES and related components

Anodized Gladhands  
Storage Brackets  
Modular ABS System  
Centrally Located Valves System

### AVAILABLE OPTIONS

Customer Specified Drawbar Length • Lunette Eye - Standard, "Snubber" or Swivel  
Single Ultra Wide-Base Tires • Aluminum Wheels • Tire Inflation System  
Brake Monitoring System • Hubodometer • Jackstand